



Beam Angle (Full): 38°

0.5	0.32	7468
1.0	0.45	1867
1.5	0.67	830
2.0	0.89	467
2.5	1.12	299
3.0	1.34	207


Distance (m) Cone Diameter (m) Illuminance (lx)

Product Description

Surface mounted COB square Downlight luminaire, Die-cast Aluminum Alloy Housing with advance powder spray technology, anti-oxidation and anti-corrosion. Designed and equipped with anti-glare baffle.

Applications: For star-rated hotels, restaurants, bars, boutiques, clubs, entertainment places, exhibition centers, museums, offices, opera houses, stores, homes, villas, etc.

明装COB方形筒灯选用压铸式铝合金外壳，采用先进的粉末喷涂技术，有效提高抗氧化性和耐腐蚀性。

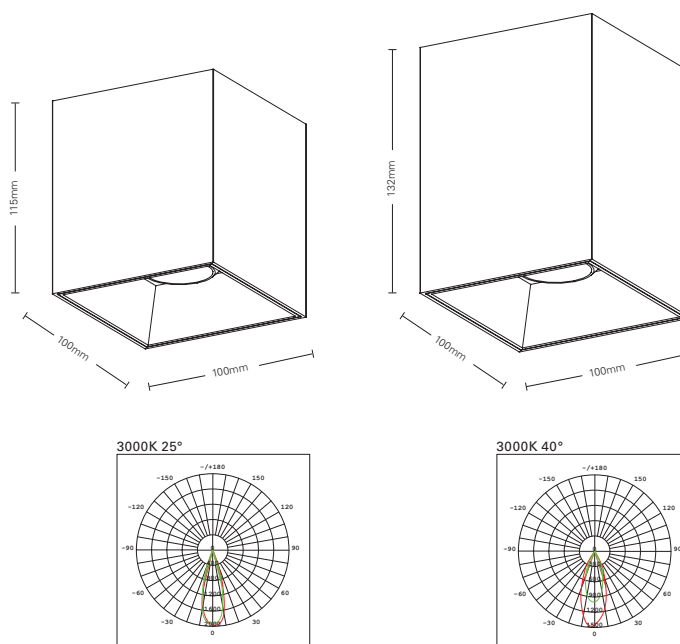

Product Name/产品名称	FC1025	FC1026
Dimension/尺寸	100*100*115mm	100*100*132mm
Lamp Source/光源	Cree COB	Cree COB
Wattage/瓦数	10W	15W
Luminous Flux/光通量	636lm	982lm
Luminaire Efficacy/光效	64 Lumen / Watt	65 Lumen / Watt
Color Temperature/色温	2700K, 3000K, 4000K, 5000K	2700K, 3000K, 4000K, 5000K
CRI/显色指数	>80 (over 90 optional)	>80 (over 90 optional)
Dimming Method/调光方式	Triac, 0-10V, Dali	Triac, 0-10V, Dali
Beam Angle/光束角	25°/40°/50°	25°/40°/50°
Reflector Colour/反光杯颜色	Black	Black
Available Color/外壳颜色	White, Black	White, Black
Shell material/外壳材质	Aluminum	Aluminum
IP Rating/防护等级	IP20	IP20
Certification/证书	CE	CE

FC1025/FC1026