



Beam Angle (Full): 24°		
0.5	0.19	10718
1.0	0.38	2679
1.5	0.57	1191
2.0	0.76	670
2.5	0.95	429
3.0	1.14	298





Beam Angle (Full): 38°		
0.5	0.45	3995
1.0	0.67	999
1.5	1.01	444
2.0	1.35	250
2.5	1.68	160
3.0	2.02	111

### Product Description

Deep Recessed COB round Pin-hole Downlight luminaire , Die-cast Aluminum Alloy Housing with advance powder spray technology , anti-oxidation and anti-corrosion . Designed and equipped with anti-glare housing.

Applications: For star-rated hotels, restaurants, bars, boutiques, clubs, entertainment places, exhibition centers, museums, offices, opera houses, stores, homes, villas, etc.

嵌入式COB筒灯，压铸式铝外壳，先进的粉末喷涂技术，有效提高抗氧化性和防腐性。

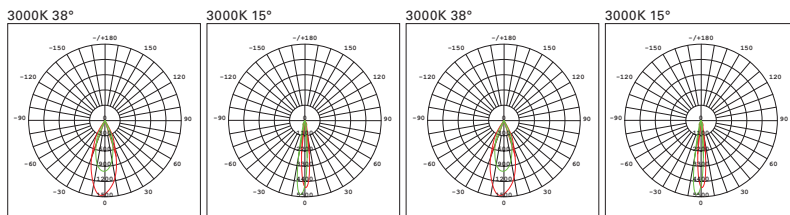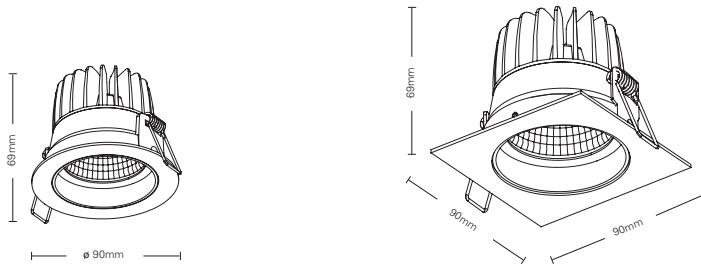

Product Name/产品名称	FR1201	FR1202
Dimension/尺寸	ø 90mm*69mm	90mm*90mm *69mm
Lamp Source/光源	CREE COB (Bridgelux / CITIZEN Optional)	CREE COB (Bridgelux / CITIZEN Optional)
Wattage/瓦数	10W	10W
Luminous Flux/光通量	650 Lumen	650 Lumen
Luminaire Efficacy/光效	65 Lumen / Watt	65 Lumen / Watt
Color Temperature/色温	2700K, 3000K, 4000K, 5000K	2700K, 3000K, 4000K, 5000K
CRI/显色指数	>80 (over 90 optional)	>80 (over 90 optional)
Dimming Method/调光方式	Triac, 0-10V, Dali	Triac, 0-10V, Dali
Beam Angle/光束角	15° / 24° / 38°	15° / 24° / 38°
Cut Hole Size/开孔尺寸	ø 83mm	ø 83mm
Reflector Colour/反光杯颜色	Silver	Silver
Available Color/外壳颜色	White, Black	White, Black
Shell material/外壳材质	Aluminum	Aluminum
IP Rating/防护等级	IP20	IP20
Certification/证书	CE	CE