



# I GU10/MR16 (ADV)

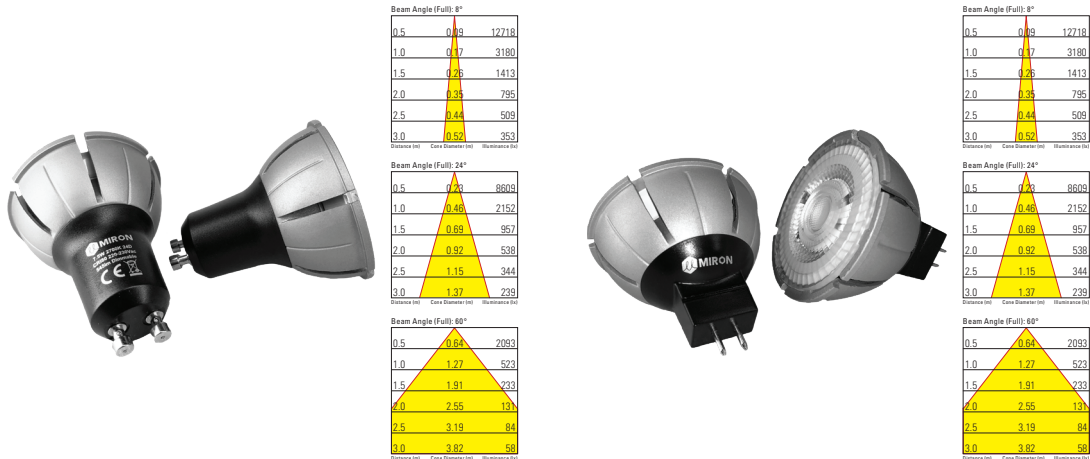

## Product Description

Classic Designed MR16 Dimmable LED , it is designed to have excellent 24 / 36 / 60 Beam angle choices.

经典的MR16设计，LED，可调光。24/36/60光束角度可选，出光效果优异。

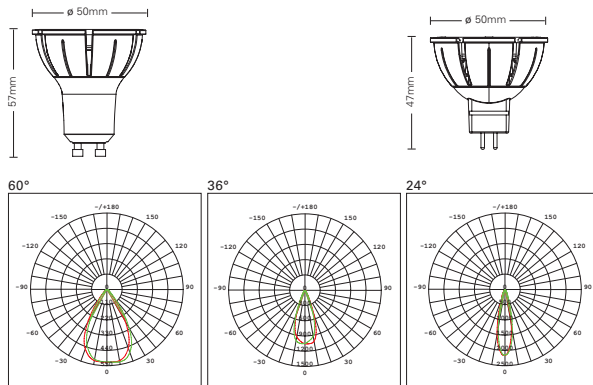

| Product Name/产品名称       | GU10 ADV                                                                  |           |           |           | MR16 ADV                                                |           |           |           |
|-------------------------|---------------------------------------------------------------------------|-----------|-----------|-----------|---------------------------------------------------------|-----------|-----------|-----------|
| Dimension/尺寸            | ø 50mm                                                                    |           |           |           | ø 50mm                                                  |           |           |           |
| Lamp Source/光源          | LED                                                                       |           |           |           | LED                                                     |           |           |           |
| Wattage/瓦数              | 5W                                                                        | 5.5W      | 6.5W      | 7.5W      | 5W                                                      | 5.5W      | 7W        | 7.5W      |
| 2700K Luminous Flux/光通量 | 450 Lumen                                                                 | 450 Lumen | 545 Lumen | 545 Lumen | 450 Lumen                                               | 450 Lumen | 630 Lumen | 630 Lumen |
| 3000K Luminous Flux/光通量 | 450 Lumen                                                                 | 450 Lumen | 545 Lumen | 545 Lumen | 450 Lumen                                               | 450 Lumen | 630 Lumen | 630 Lumen |
| 4000K Luminous Flux/光通量 | 470 Lumen                                                                 | 470 Lumen | 565 Lumen | 565 Lumen | 470 Lumen                                               | 470 Lumen | 650 Lumen | 650 Lumen |
| Luminaire Efficacy/光效   | >70 Lumen / Watt                                                          |           |           |           | >80 Lumen / Watt                                        |           |           |           |
| Color Tempature/色温      | 2700K , 3000K , 4000K                                                     |           |           |           | 2700K , 3000K , 4000K                                   |           |           |           |
| CRI/显色指数                | >80                                                                       |           |           |           | >80                                                     |           |           |           |
| Dimming Method/调光方式     | Phase cut*                                                                |           |           |           | Phase cut, 0-10V*                                       |           |           |           |
| Beam Angle/光束角          | 24° / 36° / 60°                                                           |           |           |           | 24° / 36° / 60°                                         |           |           |           |
| Available Color/外壳颜色    | Grey                                                                      |           |           |           | Grey                                                    |           |           |           |
| Shell material/外壳材质     | Aluminum + Polycarbonate                                                  |           |           |           | Aluminum + Polycarbonate                                |           |           |           |
| IP Rating/防护等级          | IP20                                                                      |           |           |           | IP20                                                    |           |           |           |
| Certificate/证书          | CE, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62471, EN62493, EN62560 |           |           |           | CE, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62031 |           |           |           |

\*Check with MIRON Engineering Team.