



Beam Angle (Full): 100°

0.5	1.42	6579
1.0	2.85	1345
1.5	4.27	731
2.0	5.69	411
2.5	7.11	263
3.0	8.54	183



Distance (m) Cross Diameter (mm) Illuminance (lx)

Product Description

High Lumen pendant luminaire with integrated LED linear light. Installation can be by hanged wires or surface mounted, optional accessories include wires.

Applications: For star-rated hotels, restaurants, bars, boutiques, clubs, entertainment places, exhibition centers, museums, offices, opera houses, stores, homes, villas, etc.

高流明吊灯。安装可以通过吊线，可选配件包括电线和连接塑料部件。

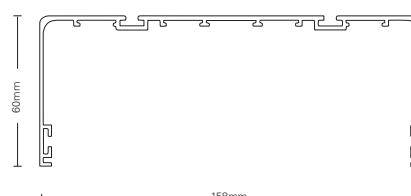

Product Name/产品名称	SK16060			
Dimension(WxH)/尺寸	158mm x 60mm			
Dimension(L)/尺寸	0.6m	0.9m	1.2m	1.5m
Lamp Source/光源	LED			
Wattage/瓦数	30W	40W	54W	80W
Luminous Flux/光通量	1800 Lumen	2700 Lumen	4500 Lumen	7200 Lumen
Luminaire Efficacy/光效	80 Lumen / Watt			
Color Temperature/色温	3000K/4000K/6000K			
CRI/显色指数	>82			
Dimming Method/调光方式	Triac, 0-10V, Dali			
Beam Angle/光束角	100°			
Available Color/外壳颜色	Black Powder Spray as Default			
Shell Material/外壳材质	Aluminum+Polycarbonate		Aluminum+Acrylic	
IP Rating/防护等级	IP20			

SK16060