

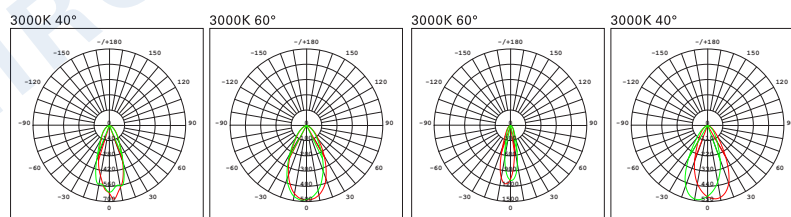




### Product Description

Fired Rated downlight conform BS476-21, match the fire rating of the ceiling, maintaining its minimum period of fire resistance. They are tested for up to 60 minutes of fire resistance, which is enough for most ceilings in most buildings.

Applications: For star-rated hotels, restaurants, bars, boutiques, clubs, entertainment places, exhibition centers, museums, offices, opera houses, stores, homes, villas, etc.



<b>Product Name</b>	FR1190	FR1296
<b>Dimension</b>	ø 88mm*65mm	ø 88mm*72mm
<b>Lamp Source</b>	CREE COB (Bridgelux / CITIZEN Optional)	CREE COB (Bridgelux / CITIZEN Optional)
<b>Wattage</b>	10W	10W
<b>Luminous Flux</b>	730 Lumen	750 Lumen
<b>Luminaire Efficacy</b>	73 Lumen / Watt	75 Lumen / Watt
<b>Color Temperature</b>	2700K, 3000K, 4000K, 5000K	2700K, 3000K, 4000K, 5000K
<b>CRI</b>	>80 (over 90 optional)	>80 (over 90 optional)
<b>Dimming Method</b>	Triac, 0-10V, Dali	Triac, 0-10V, Dali
<b>Beam Angle</b>	17° / 40° / 60°	24° / 36°
<b>Tilt Angle</b>	N/A	N/A
<b>Rotation Angle</b>	N/A	N/A
<b>Cut Hole Size</b>	ø 70mm	ø 68mm
<b>Available Color</b>	White, Black	White, Black
<b>Certification</b>	CE	CE
<b>IP Rating</b>	IP65	IP65

FR1190 / FR1296