




Product Description

Recessed Downlight luminaire, Die-cast Aluminum Alloy Housing with advance powder spray technology, anti-oxidation and anti-corrosion. Carried with anti-glare baffle accessories.

Recessed Tilted Downlight luminaire, Die-cast Aluminum Alloy Housing with advance powder spray technology, anti-oxidation and anti-corrosion. Carried with anti-glare baffle accessories.

Applications: For star-rated hotels, restaurants, bars, boutiques, clubs, entertainment places, exhibition centers, museums, offices, opera houses, stores, homes, villas, etc.

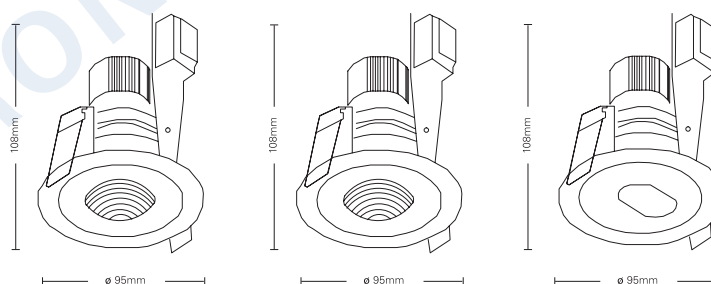

Product Name	B3016	B3020	B3014
Dimension	ø 95*108mm	ø 95*108mm	ø 95*108mm
Lamp Source	MIRON LED MR16 PRO 3000K		
Wattage	7.5W	7.5W	7.5W
Luminous Flux	480 Lumen	480 Lumen	480 Lumen
Luminaire Efficacy	64 Lumen / Watt	64 Lumen / Watt	64 Lumen / Watt
Color Temperature	2700K, 3000K, 4000K	2700K, 3000K, 4000K	2700K, 3000K, 4000K
CRI	≥97	≥97	≥97
Dimming Method	Triac, 0-10V, Dali	Triac, 0-10V, Dali	Triac, 0-10V, Dali
Beam Angle	8° / 24° / 36° / 60°	8° / 24° / 36° / 60°	8° / 24° / 36° / 60°
Tilt Angle	N/A	0° - 30°	0° - 30°
Rotation Angle	N/A	350°	350°
Cut Hole Size	83mm	83mm	83mm
Available Color	White, Black	White, Black	White, Black
Certification	CE	CE	CE

| B3016 / B3020 / B3014